


40G QSFP+ to 40G QSFP+ DAC

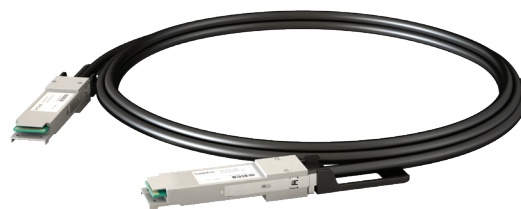

0.5~7m

PVC Black

Key Features

- Support 4x10.3125G NRZ
- InfiniBand QDR & Ethernet compatible
- Maximum link length up to 7m
- Single Wire Size: 24AWG~30AWG
- Maximum power consumption:<0.05W each end
- Case temperature range: 0°C to 70°C
- 3.3V Power Supply
- Hot Pluggable
- RoHS Compliance

Applications

- Data center & Networking Equipment
- Servers/Storage Devices
- High Performance Computing (HPC)
- Switches/Routers

Supported Standards

- QSFP+ MSA/SFP+ MSA
- SFF-8636/SFF-8472
- IEEE 802.3ba



Ordering Information

LEQQ-WC1xxxC 40G QSFP+ to 40G QSFP+ DAC – 0.5~7m

Ordering P/Ns	Description	Length	AWG	Cable	NOTE
LEQQ-WC1030C	40G QSFP+ to 40G QSFP+ DAC	3.0m	30 AWG	PVC Black	
LEQQ-WC1045C	40G QSFP+ to 40G QSFP+ DAC	4.5m	28 AWG	PVC Black	
LEQQ-WC1070C	40G QSFP+ to 40G QSFP+ DAC	7.0m	24 AWG	PVC Black	

xxx define DAC cable length

Disclaimer

Images are for illustrative purposes only and may not accurately represent the actual product. Specifications and appearances are subject to change without prior notice.


The information provided in this datasheet is subject to change without notice. Lumulus Technologies assumes no responsibility for any errors or omissions. Performance may vary depending on application and operating conditions. Product specifications are provided for reference only and do not constitute a warranty.

For assistance and more information, please contact your sales representative or write to sales@lumulus.com

Lumulus Technologies, Inc. USA

Headquarter

9685 Via Excelencia Suite 106
San Diego, CA 92126
USA

 (+1) 858-397-2228

 www.lumulus.com

 sales@lumulus.com



Lumulus Technologies, Inc. (Thailand Branch)

Production Site

30/30 Moo2, Tambol Wangchula
Amphur, Wagnoi, Phranakorn
Sri Ayutthaya - 13170, Thailand



- **Lumulus Tech offers 24/7 support,**
- with experts ready to assist with all your technical needs and questions.



tech.support@lumulus.com



sales@lumulus.com