

50G QSFP28(CH1/CH3) to 2x25G SFP28 DAC



0.5~5m

PVC Black

Key Features


- Support 2x25.78125G NRZ
- InfiniBand EDR & Ethernet compatible
- Maximum link length up to 5m
- Single Wire Size: 26AWG~30AWG
- Maximum power consumption:<0.05W each end
- Case temperature range: 0°C to 70°C
- 3.3V Power Supply
- Hot Pluggable
- RoHS Compliance

Applications

- Data center & Networking Equipment
- Servers/Storage Devices
- High Performance Computing (HPC)
- Switches/Routers

Supported Standards

- QSFP MSA/SFP MSA
- SFF-8636/SFF- 8472
- IEEE 802.3bj

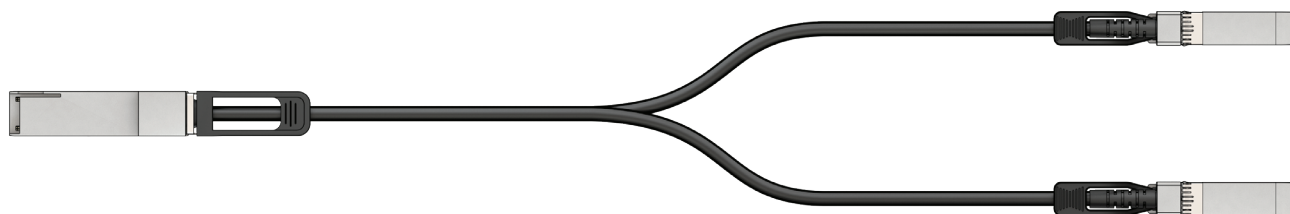

Ordering Information

LEQP-JU2xxxC	50G QSFP28(CH1/CH3) to 2x25G SFP28 DAC – 0.5~5m				
Ordering P/Ns	Description	Length	AWG	Cable	NOTE
LEQP-JU2030C	50G QSFP28(CH1/CH3) to 2x25G SFP28 DAC	3.0m	30 AWG	PVC Black	
LEQP-JU2040C	50G QSFP28(CH1/CH3) to 2x25G SFP28 DAC	4.0m	28 AWG	PVC Black	
LEQP-JU2050C	50G QSFP28(CH1/CH3) to 2x25G SFP28 DAC	5.0m	26 AWG	PVC Black	
xxx define DAC cable length					

Disclaimer

Images are for illustrative purposes only and may not accurately represent the actual product. Specifications and appearances are subject to change without prior notice.


The information provided in this datasheet is subject to change without notice. Lumulus Technologies assumes no responsibility for any errors or omissions. Performance may vary depending on application and operating conditions. Product specifications are provided for reference only and do not constitute a warranty.

For assistance and more information, please contact your sales representative or write to sales@lumulus.com

Lumulus Technologies, Inc. USA

Headquarter

9685 Via Excelencia Suite 106
San Diego, CA 92126
USA

 (+1) 858-397-2228

 www.lumulus.com

 sales@lumulus.com



Lumulus Technologies, Inc. (Thailand Branch)

Production Site

30/30 Moo2, Tambol Wangchula
Amphur, Wagnoi, Phranakorn
Sri Ayutthaya - 13170, Thailand



- Lumulus Tech offers 24/7 support,
- with experts ready to assist with all your technical needs and questions.



tech.support@lumulus.com



sales@lumulus.com